


Inline Valves



ORDERING CODE


VRF C3/V/VS38

Type


Port threads G :38,12,34

Type	P _{max.}	Q _{max.} (L/min)		G	A	C	E	F	N	P	K	H	L	d	Z	T
	bar	At port P	At port A		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
VRF C3/V/VS38	250	60	40	G 3/8"	90	72,5	48	78	30	6	40	129	110,5	6,5	71	40
VRF C3/V/VS12		90	50	G 1/2"												
VRF C3/V/VS34		150	90	G 3/4"												

All performances and calibration are carried out by using hydraulic oil with viscosity approx. 46 cSt at 50 °C
.Temperature range: -20 °C...+80 °C.Filtration absolute: 25µm
Valve setting pressure 15...20 bar over the working pressure.



VRF C3/V/VS38
VRF C3/V/VS12

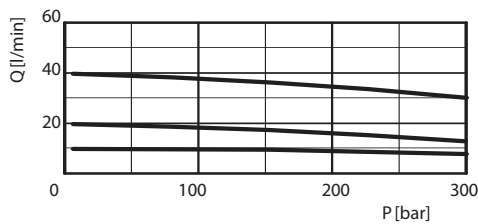

VRF C3/V/VS34
P → A

