




DIRECT MOUNTED MOTOR VALVES - BDS
Handle Operated DCV, MS Series



ORDERING CODE

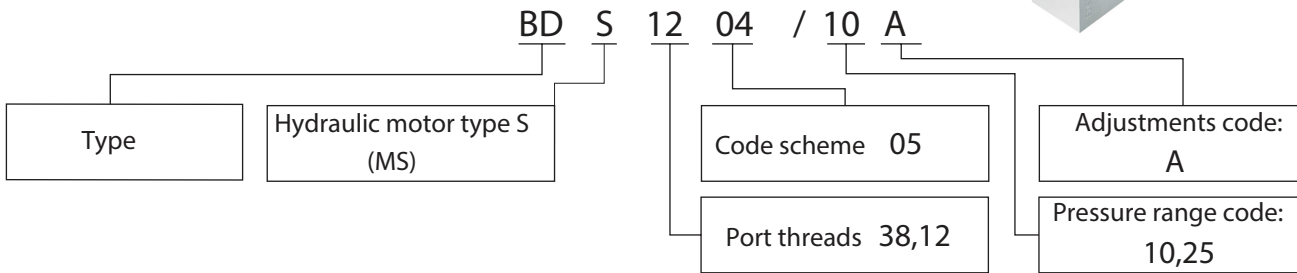


Code	Adjustments
A	Leakproof hex. socket screw 



PORT THREADS CODE	
Port threads G3/8"	38
Port threads G1/2"	12

SPECIFICATIONS

TECHNICAL DATA		
Nominal flow rate for type 38	L/min	25
Nominal flow rate for type 12	L/min	50

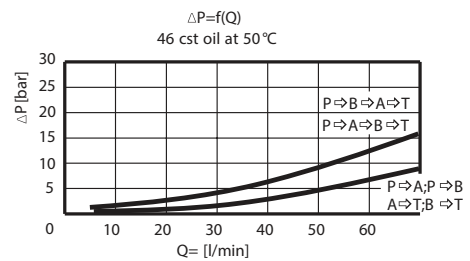

Pressure range			
Code	Standard setting bar (Q=5l/min)	Adj. pressure range bar	Colour
10	80	10...100	White
25	180	30...250	Yellow

DIMENSIONS

